

# BARTLEIGH URINAL

## 0.47LPF / 0.125GPF | WALL MOUNTED

- ☐ 4810BNX Top Inlet
- ☐ 4810BNY Rear Inlet

### PRODUCT SPECS

- Ultra high efficiency urinal
- 0.47Lpf / 0.125Gpf
- Vitreous china
- Washout flush action
- 3/4" Top or rear inlet spud
- Outlet connection threaded 2" inside NPTF
- Flushing rim
- Mounting hardware supplied
- Optional concealed carrier installation
- Extended sides for privacy
- Internal trap
- Flushometer not included
- Ceramic drain cover included

### DIMENSIONS

470mm W x 345mm D x 680mm H

18½" W x 13⅝" D x 26¾" H

### COMPLIANCE CERTIFICATIONS

Meets or exceeds the following:

- IAPMO cUPC
- US EPA WaterSense  
*Please note: In order to comply with WaterSense certification, this urinal must be used with a 0.47Lpf / 0.125Gpf WaterSense labeled flushometer.*
- ASME A112.19.2 / CSA B45.1
- ADA Guidelines & ANSI A117.1
- IAPMO Green, Calgreen, and LEED Compliant

### SHIPPING

Cube 4.94  
GW 60 lbs




### TO BE SPECIFIED

Colour:

- ☒ Soft White

**NOTES:** Flush Valve is not included and must be ordered separately. Provide suitable reinforcement for all wall supports. Important: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

Complies with ADA Section 4.18 when installed per code.

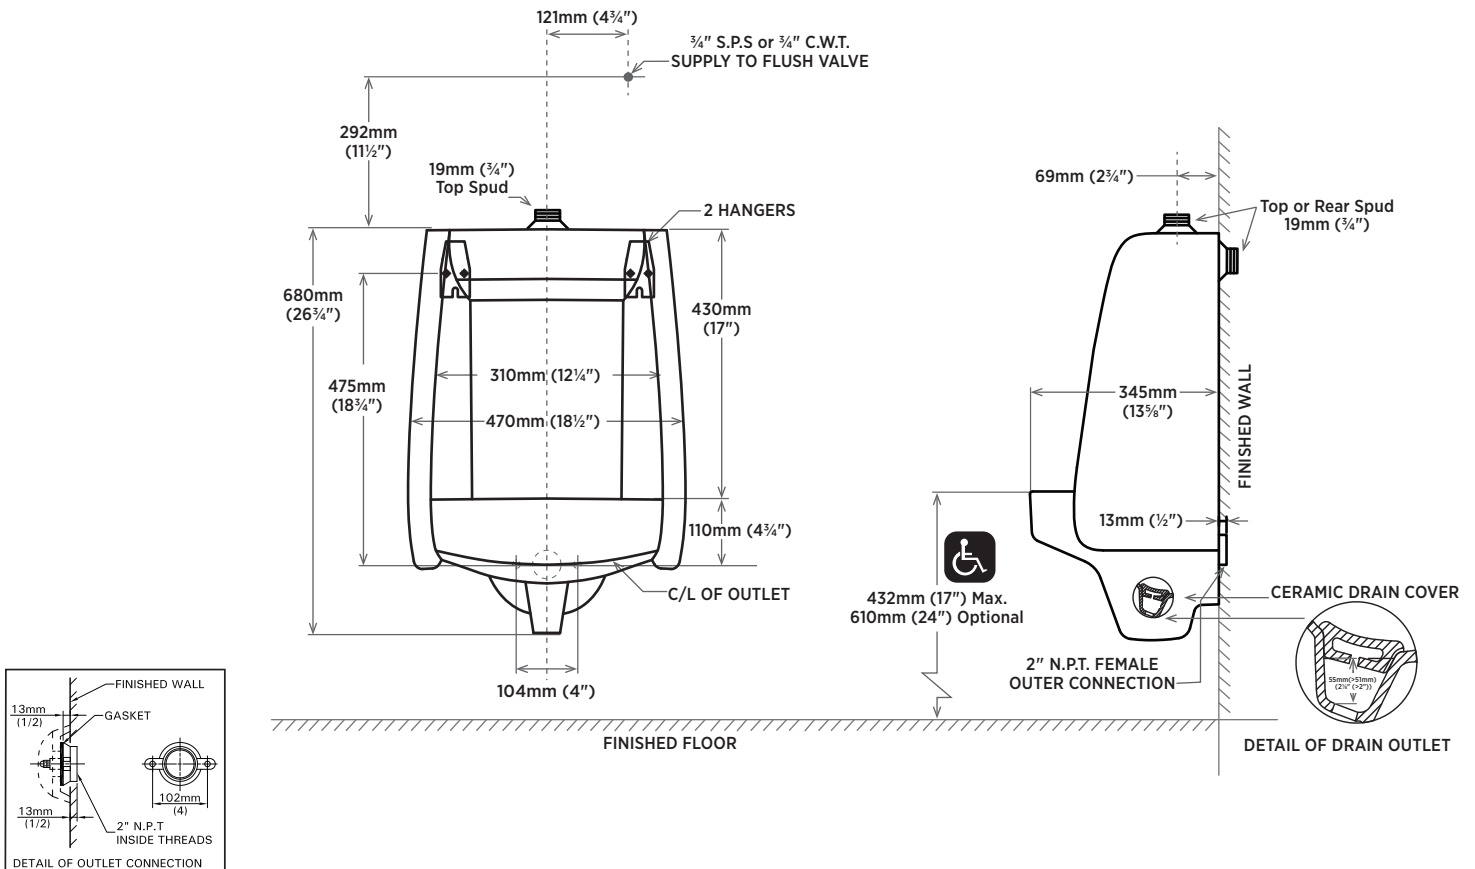

REVISED MARCH 2021

**contrac**

5970 CHEDWORTH WAY, UNIT B, MISSISSAUGA, ONTARIO, CANADA L5R 4G5 | CONTRAC.CA