

KOLBY URINAL

0.47LPF / 0.125GPF | WALL MOUNTED

- 4810BSX Top Inlet
- 4810BSY Rear Inlet
- 4810BSX-077 Matte Black - Top Inlet

PRODUCT SPECS

- Ultra High efficiency urinal
- 0.47Lpf / 0.125Gpf
- Vitreous china
- Washout flush action
- 3/4" Top or back inlet spud
- Outlet connection threaded 2" inside NPTF
- Flushing rim
- Extended sides for privacy
- Integral trap
- 12 3/8" rim from finished wall
- Wall hangers and screws included
- Vitreous china strainer included
- Flushometer not included

DIMENSIONS

352mm W x 314mm D x 550mm H
 13 7/8" W x 12 3/8" D x 21 1/8" H

COMPLIANCE CERTIFICATIONS

- Meets or exceeds the following:
- IAPMO cUPC
 - US EPA WaterSense
Please note: In order to comply with WaterSense certification this urinal must be used with a 0.47Lpf / 0.125Gpf WaterSense labeled flushometer.
 - ASME A112.19.2 / CSA B45.1
 - LEED Compliant

SHIPPING

Cube 3.39
 GW 35 lbs




TO BE SPECIFIED

- Colour:
- Soft White
 - Matte Black

NOTES: Flush Valve is not included and must be ordered separately. Provide suitable reinforcement for all wall supports. Important: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

Complies with ADA Section 4.18 when installed per code.

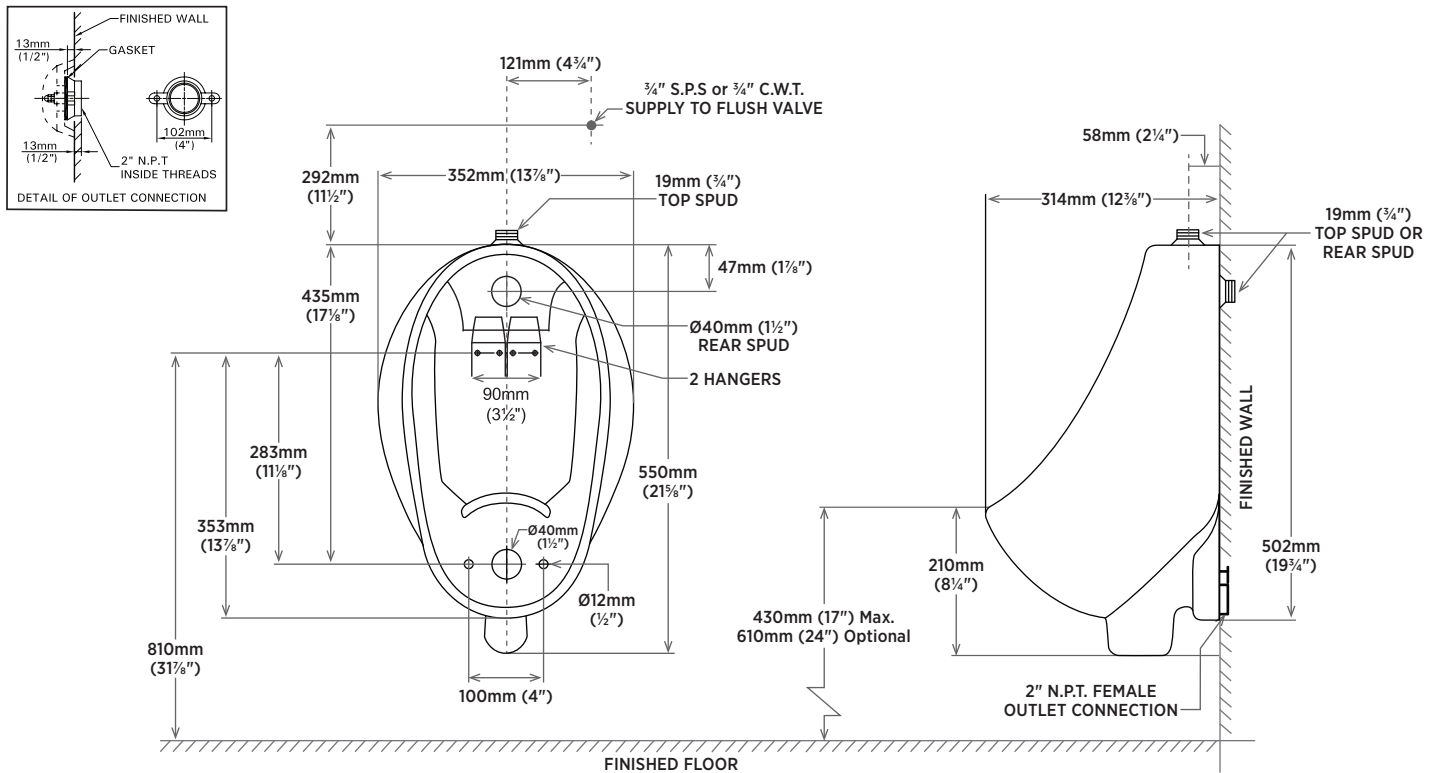

REVISED DECEMBER 2022