# **CARLAW** ONE PIECE TOILET
**4.8LPF / 1.28GPF**

☐ **4710BHVU** Unlined Tank
☐ **4710BHVU-L** Unlined Locking Tank

### PRODUCT SPECS
- High effciency toilet
- 4.8Lpf / 1.28Gpf
- Elongated bowl with concealed skirted trapway
- Vitreous china
- 15¾" Bowl height
- Soft white tank lever
- 12" (305mm) Rough-in
- 2" Fully glazed ball pass trapway
- 3" Flapper
- Siphon jet flush action
- Water surface: 9½" x 6⅝" (240mm x 170mm)
- Decorative soft white side caps included
- Toilet seat not included

### DIMENSIONS
395mm W x 680mm D x 760mm H
15½" W x 26¾" D x 30" H

### COMPLIANCE CERTIFICATIONS
Meets or exceeds the following:
- IAPMO cUPC
- US EPA WaterSense
- ASME A 112.19.2/ CSA B45.1
- MaP Tested 1000g
- LEED Compliant
- CSA B651

### SHIPPING
| | |
|---|---|
| Cube | 7.29 |
| GW | 106 lbs |

**TO BE SPECIFIED**
Colour:
■ Soft White

**NOTES:** This toilet is designed to rough-in at a minimum dimension of 305mm (12") from finished wall to C/L of outlet. Supply line not included with fixture and must be ordered separately.

Important: Dimensions of fixtures are nominal and may vary within the range of tolerances establishedby ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

**Products are designed to comply CSA B651 Standard. It shall be the responsibility of the installer to comply with the local disability codes and standards prior to installing the product.**
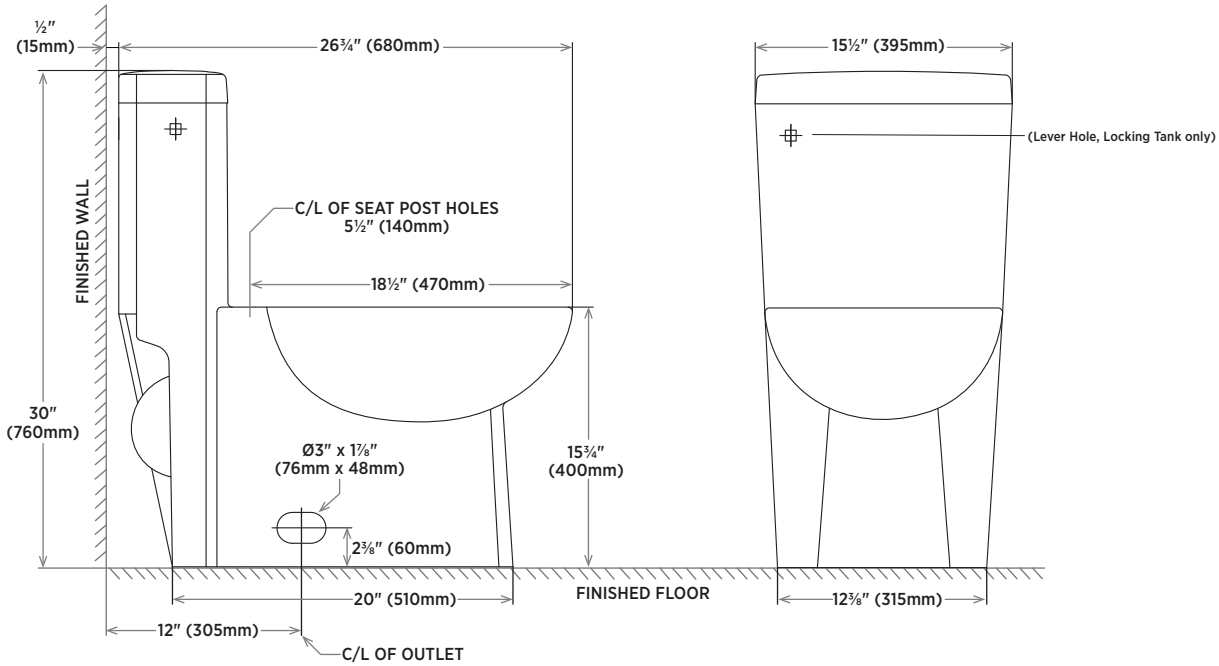
**For additional component options and specifications, please visit contrac.ca / contrac.us**